
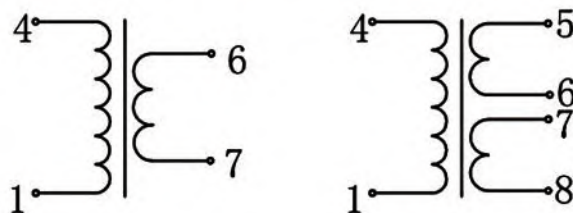


◆ Encapsulated Transformer

E2006 Series (EF20/6)

Overall and installation dimension

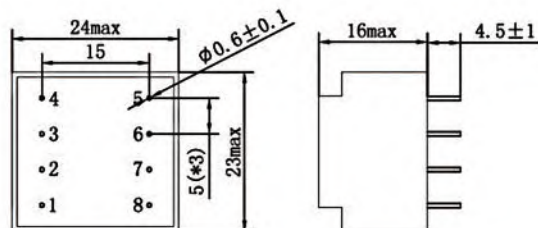



Specifications

0.35VA	ta70°C/B	Single Secondary Models		
Prim.230V	Prim.115V	Vsec.	Isec.	Certificaton
E2006064	E2006164	4.5V	78mA	ECM
E2006050	E2006150	6V	58mA	ECM
E2006052	E2006152	7.5V	47mA	ECM
E2006054	E2006154	9V	39mA	ECM
E2006056	E2006156	12V	29mA	ECM
E2006058	E2006158	15V	23mA	ECM
E2006060	E2006160	18V	19mA	ECM
E2006062	E2006162	24V	15mA	ECM

0.45VA	ta70°C/B	Dual Secondary Models		
Prim.230V	Prim.115V	Vsec.	Isec.	Certificaton
E2006015	E2006115	2x4.5V	2x50mA	ECM
E2006001	E2006101	2x6V	2x38mA	ECM
E2006003	E2006103	2x7.5V	2x30mA	ECM
E2006005	E2006105	2x9V	2x25mA	ECM
E2006007	E2006107	2x12V	2x19mA	ECM
E2006009	E2006109	2x15V	2x15mA	ECM
E2006011	E2006111	2x18V	2x13mA	ECM
E2006013	E2006113	2x24V	2x9mA	ECM

E2010 Series (EF20/10.5)

Overall and installation dimension

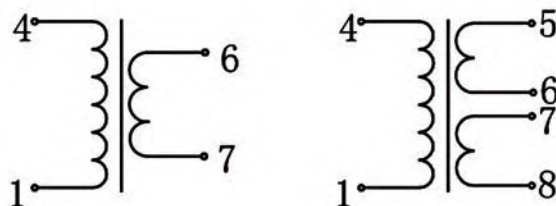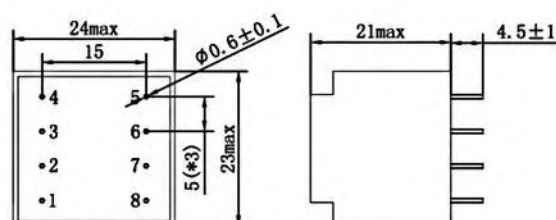

Specifications



0.5VA	ta70°C/B	Single Secondary Models		
Prim.230V	Prim.115V	Vsec.	Isec.	Certificaton
E2010064	E2010164	4.5V	111mA	ECM
E2010050	E2010150	6V	83mA	ECM
E2010052	E2010152	7.5V	67mA	ECM
E2010054	E2010154	9V	56mA	ECM
E2010056	E2010156	12V	42mA	ECM
E2010058	E2010158	15V	33mA	ECM
E2010060	E2010160	18V	28mA	ECM
E2010062	E2010162	24V	21mA	ECM

0.6VA	ta40°C/B	Dual Secondary Models		
Prim.230V	Prim.115V	Vsec.	Isec.	Certificaton
E2010015	E2010115	2x4.5V	2x67mA	ECM
E2010001	E2010101	2x6V	2x50mA	ECM
E2010003	E2010103	2x7.5V	2x40mA	ECM
E2010005	E2010105	2x9V	2x33mA	ECM
E2010007	E2010107	2x12V	2x25mA	ECM
E2010009	E2010109	2x15V	2x20mA	ECM
E2010011	E2010111	2x18V	2x17mA	ECM
E2010013	E2010113	2x24V	2x13mA	ECM

◆ Encapsulated Transformer

E3005 Series (EI30/5)

Overall and installation dimension

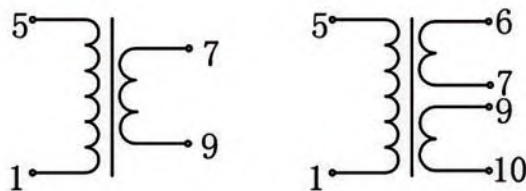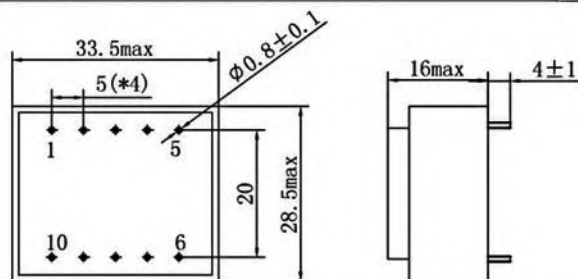



Specifications

0.5VA	ta70°C/B	Single Secondary Models		
Prim.230V	Prim.115V	Vsec.	Isec.	Certificaton
E3005064	E3005164	4.5V	111mA	ECM
E3005050	E3005150	6V	83mA	ECM
E3005052	E3005152	7.5V	67mA	ECM
E3005054	E3005154	9V	56mA	ECM
E3005056	E3005156	12V	42mA	ECM
E3005058	E3005158	15V	33mA	ECM
E3005060	E3005160	18V	28mA	ECM
E3005062	E3005162	24V	21mA	ECM

0.5VA	ta70°C/B	Dual Secondary Models		
Prim.230V	Prim.115V	Vsec.	Isec.	Certificaton
E3005065	E3005165	2x4.5V	2x56mA	ECM
E3005051	E3005151	2x6V	2x42mA	ECM
E3005053	E3005153	2x7.5V	2x33mA	ECM
E3005055	E3005155	2x9V	2x28mA	ECM
E3005057	E3005157	2x12V	2x21mA	ECM
E3005059	E3005157	2x15V	2x17mA	ECM
E3005061	E3005161	2x18V	2x14mA	ECM
E3005063	E3005163	2x24V	2x10mA	ECM

E3005 Series (EI30/5)

Overall and installation dimension

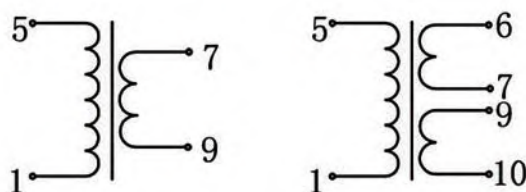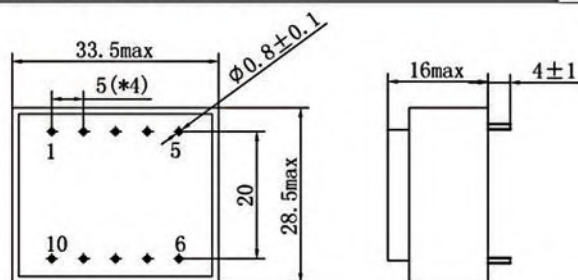

Specifications



0.6VA	ta40°C/B	Single Secondary Models		
Prim.230V	Prim.115V	Vsec.	Isec.	Certificaton
E3005014	E3005114	4.5V	133mA	ECM
E3005000	E3005100	6V	100mA	ECM
E3005002	E3005102	7.5V	80mA	ECM
E3005004	E3005104	9V	67mA	ECM
E3005006	E3005106	12V	50mA	ECM
E3005008	E3005108	15V	40mA	ECM
E3005010	E3005110	18V	33mA	ECM
E3005012	E3005112	24V	25mA	ECM

0.6VA	ta40°C/B	Dual Secondary Models		
Prim.230V	Prim.115V	Vsec.	Isec.	Certificaton
E3005015	E3005115	2x4.5V	2x67mA	ECM
E3005001	E3005101	2x6V	2x50mA	ECM
E3005003	E3005103	2x7.5V	2x40mA	ECM
E3005005	E3005105	2x9V	2x33mA	ECM
E3005007	E3005107	2x12V	2x25mA	ECM
E3005009	E3005109	2x15V	2x20mA	ECM
E3005011	E3005111	2x18V	2x17mA	ECM
E3005013	E3005113	2x24V	2x13mA	ECM

◆ Encapsulated Transformer

E3011 Series (EI30/10.5)

Overall and installation dimension

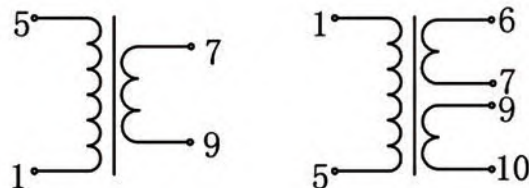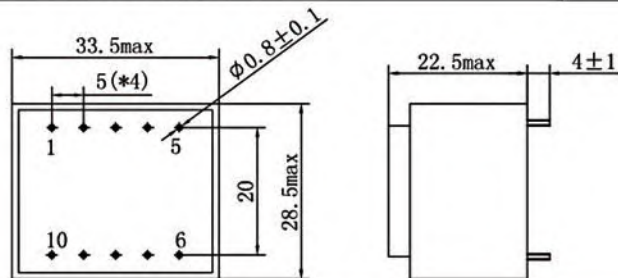



Specifications

1.2VA	ta70°C/B	Single Secondary Models		
Prim.230V	Prim.115V	Vsec.	Isec.	Certificaton
E3011064	E3011164	4.5V	266mA	ECM
E3011050	E3011150	6V	200mA	ECM
E3011052	E3011152	7.5V	160mA	ECM
E3011054	E3011154	9V	133mA	ECM
E3011056	E3011156	12V	100mA	ECM
E3011058	E3011158	15V	80mA	ECM
E3011060	E3011160	18V	66mA	ECM
E3011062	E3011162	24V	50mA	ECM

1.2VA	ta70°C/B	Dual Secondary Models		
Prim.230V	Prim.115V	Vsec.	Isec.	Certificaton
E3011065	E3011165	2x4.5V	2x133mA	ECM
E3011051	E3011151	2x6V	2x100mA	ECM
E3011053	E3011153	2x7.5V	2x80mA	ECM
E3011055	E3011155	2x9V	2x66mA	ECM
E3011057	E3011157	2x12V	2x50mA	ECM
E3011059	E3011159	2x15V	2x40mA	ECM
E3011061	E3011161	2x18V	2x33mA	ECM
E3011063	E3011163	2x24V	2x25mA	ECM

E3011 Series (EI30/10.5)

Overall and installation dimension

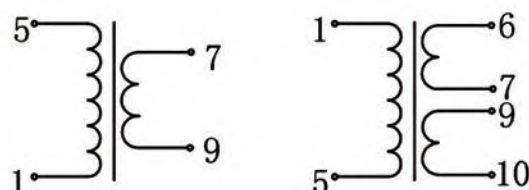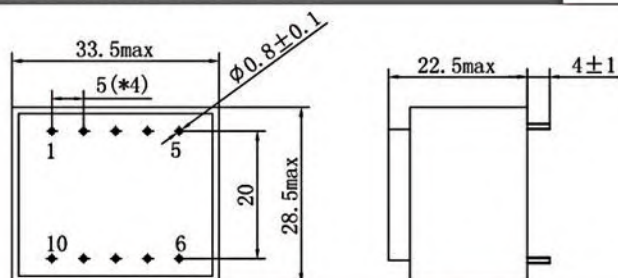

Specifications





1.5VA	ta40°C/B	Single Secondary Models		
Prim.230V	Prim.115V	Vsec.	Isec.	Certificaton
E3011014	E3011114	4.5V	333mA	ECM
E3011000	E3011100	6V	250mA	ECM
E3011002	E3011102	7.5V	200mA	ECM
E3011004	E3011104	9V	166mA	ECM
E3011006	E3011106	12V	125mA	ECM
E3011008	E3011108	15V	100mA	ECM
E3011010	E3011110	18V	83mA	ECM
E3011012	E3011112	24V	62mA	ECM

1.5VA	ta40°C/B	Dual Secondary Models		
Prim.230V	Prim.115V	Vsec.	Isec.	Certificaton
E3011015	E3011115	2x4.5V	2x166mA	ECM
E3011001	E3011101	2x6V	2x125mA	ECM
E3011003	E3011103	2x7.5V	2x100mA	ECM
E3011005	E3011105	2x9V	2x83mA	ECM
E3011007	E3011107	2x12V	2x62mA	ECM
E3011009	E3011109	2x15V	2x50mA	ECM
E3011011	E3011111	2x18V	2x42mA	ECM
E3011013	E3011113	2x24V	2x31mA	ECM

◆ Encapsulated Transformer

E3013 Series (EI30/12.5)

Overall and installation dimension







Specifications

1.5VA	ta70°C/B	Single Secondary Models		
Prim.230V	Prim.115V	Vsec.	Isec.	Certificaton
E3013064	E3013164	4.5V	333mA	ECM
E3013050	E3013150	6V	250mA	ECM
E3013052	E3013152	7.5V	200mA	ECM
E3013054	E3013154	9V	167mA	ECM
E3013056	E3013156	12V	125mA	ECM
E3013058	E3013158	15V	100mA	ECM
E3013060	E3013160	18V	83mA	ECM
E3013062	E3013162	24V	63mA	ECM

1.5VA	ta70°C/B	Dual Secondary Models		
Prim.230V	Prim.115V	Vsec.	Isec.	Certificaton
E3013065	E3013165	2x4.5V	2x167mA	ECM
E3013051	E3013151	2x6V	2x125mA	ECM
E3013053	E3013153	2x7.5V	2x100mA	ECM
E3013055	E3013155	2x9V	2x83mA	ECM
E3013057	E3013157	2x12V	2x63mA	ECM
E3013059	E3013159	2x15V	2x50mA	ECM
E3013061	E3013161	2x18V	2x42mA	ECM
E3013063	E3013163	2x24V	2x31mA	ECM

E3013 Series (EI30/12.5)

Overall and installation dimension



Specifications





1.8VA	ta40°C/B	Single Secondary Models		
Prim.230V	Prim.115V	Vsec.	Isec.	Certificaton
E3013014	E3013114	4.5V	400mA	ECM
E3013000	E3013100	6V	300mA	ECM
E3013002	E3013102	7.5V	240mA	ECM
E3013004	E3013104	9V	200mA	ECM
E3013006	E3013106	12V	150mA	ECM
E3013008	E3013108	15V	120mA	ECM
E3013010	E3013110	18V	100mA	ECM
E3013012	E3013112	24V	75mA	ECM

1.8VA	ta40°C/B	Dual Secondary Models		
Prim.230V	Prim.115V	Vsec.	Isec.	Certificaton
E3013015	E3013115	2x4.5V	2x200mA	ECM
E3013001	E3013101	2x6V	2x150mA	ECM
E3013003	E3013103	2x7.5V	2x120mA	ECM
E3013005	E3013105	2x9V	2x100mA	ECM
E3013007	E3013107	2x12V	2x75mA	ECM
E3013009	E3013109	2x15V	2x60mA	ECM
E3013011	E3013111	2x18V	2x50mA	ECM
E3013013	E3013113	2x24V	2x38mA	ECM

◆ Encapsulated Transformer

E3016 Series (EI30/15.5)

Overall and installation dimension







Specifications

2.0VA	ta70°C/B	Single Secondary Models		
Prim.230V	Prim.115V	Vsec.	Isec.	Certificaton
E3016064	E3016164	4.5V	444mA	ECM
E3016050	E3016150	6V	333mA	ECM
E3016052	E3016152	7.5V	267mA	ECM
E3016054	E3016154	9V	222mA	ECM
E3016056	E3016156	12V	167mA	ECM
E3016058	E3016158	15V	133mA	ECM
E3016060	E3016160	18V	111mA	ECM
E3016062	E3016152	24V	83mA	ECM

2.0VA	ta70°C/B	Dual Secondary Models		
Prim.230V	Prim.115V	Vsec.	Isec.	Certificaton
E3016065	E3016165	2x4.5V	2x222mA	ECM
E3016051	E3016151	2x6V	2x167mA	ECM
E3016053	E3016153	2x7.5V	2x133mA	ECM
E3016055	E3016155	2x9V	2x111mA	ECM
E3016057	E3016157	2x12V	2x83mA	ECM
E3016059	E3016159	2x15V	2x67mA	ECM
E3016061	E3016161	2x18V	2x56mA	ECM
E3016063	E3016163	2x24V	2x42mA	ECM

E3016 Series (EI30/15.5)

Overall and installation dimension



Specifications


2.4VA	ta40°C/B	Single Secondary Models		
Prim.230V	Prim.115V	Vsec.	Isec.	Certificaton
E3016014	E3016114	4.5V	533mA	ECM
E3016000	E3016100	6V	400mA	ECM
E3016002	E3016102	7.5V	320mA	ECM
E3016004	E3016104	9V	267mA	ECM
E3016006	E3016106	12V	200mA	ECM
E3016008	E3016108	15V	160mA	ECM
E3016010	E3016110	18V	133mA	ECM
E3016012	E3016112	24V	100mA	ECM

2.4VA	ta40°C/B	Dual Secondary Models		
Prim.230V	Prim.115V	Vsec.	Isec.	Certificaton
E3016015	E3016115	2x4.5V	2x267mA	ECM
E3016001	E3016101	2x6V	2x200mA	ECM
E3016003	E3016103	2x7.5V	2x160mA	ECM
E3016005	E3016105	2x9V	2x133mA	ECM
E3016007	E3016107	2x12V	2x100mA	ECM
E3016009	E3016109	2x15V	2x80mA	ECM
E3016011	E3016111	2x18V	2x67mA	ECM
E3016013	E3016113	2x24V	2x50mA	ECM

◆ Encapsulated Transformer

E3018 Series (EI30/18)

Overall and installation dimension

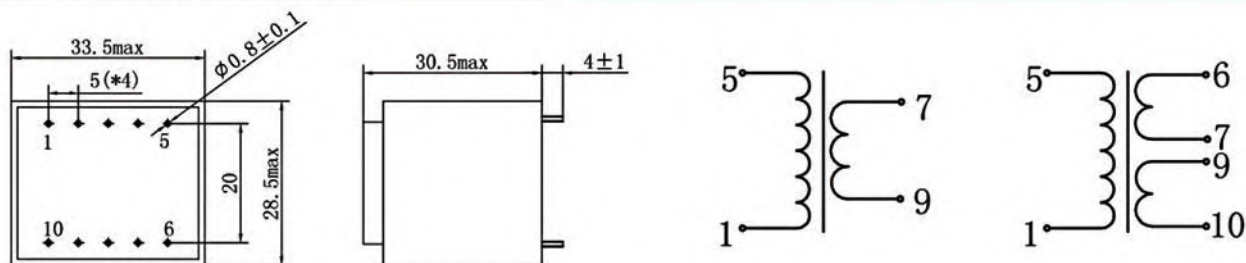


Specifications

2.3VA	ta70°C/B	Single Secondary Models		
Prim.230V	Prim.115V	Vsec.	Isec.	Certificaton
E3018064	E3018164	4.5V	511mA	ECM
E3018050	E3018150	6V	383mA	ECM
E3018052	E3018152	7.5V	307mA	ECM
E3018054	E3018154	9V	256mA	ECM
E3018056	E3018156	12V	192mA	ECM
E3018058	E3018158	15V	153mA	ECM
E3018060	E3018160	18V	128mA	ECM
E3018062	E3018162	24V	96mA	ECM

2.3VA	ta70°C/B	Dual Secondary Models		
Prim.230V	Prim.115V	Vsec.	Isec.	Certificaton
E3018065	E3018165	2x4.5V	2x256mA	ECM
E3018051	E3018151	2x6V	2x192mA	ECM
E3018053	E3018153	2x7.5V	2x153mA	ECM
E3018055	E3018155	2x9V	2x128mA	ECM
E3018057	E3018157	2x12V	2x96mA	ECM
E3018059	E3018159	2x15V	2x77mA	ECM
E3018061	E3018161	2x18V	2x64mA	ECM
E3018063	E3018163	2x24V	2x48mA	ECM

E3018 Series (EI30/18)

Overall and installation dimension

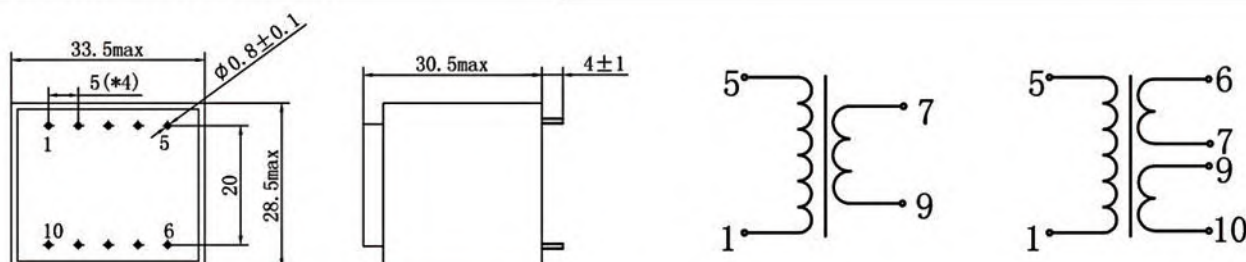

Specifications


2.8VA	ta40°C/B	Single Secondary Models		
Prim.230V	Prim.115V	Vsec.	Isec.	Certificaton
E3018014	E3018114	4.5V	622mA	ECM
E3018000	E3018100	6V	467mA	ECM
E3018002	E3018102	7.5V	373mA	ECM
E3018004	E3018104	9V	311mA	ECM
E3018006	E3018106	12V	233mA	ECM
E3018008	E3018108	15V	187mA	ECM
E3018010	E3018110	18V	156mA	ECM
E3018012	E3018112	24V	117mA	ECM

2.8VA	ta40°C/B	Dual Secondary Models		
Prim.230V	Prim.115V	Vsec.	Isec.	Certificaton
E3018015	E3018115	2x4.5V	2x311mA	ECM
E3018001	E3018101	2x6V	2x233mA	ECM
E3018003	E3018103	2x7.5V	2x187mA	ECM
E3018005	E3018105	2x9V	2x156mA	ECM
E3018007	E3018107	2x12V	2x117mA	ECM
E3018009	E3018109	2x15V	2x93mA	ECM
E3018011	E3018111	2x18V	2x78mA	ECM
E3018013	E3018113	2x24V	2x58mA	ECM

◆ Encapsulated Transformer

E3023 Series (EI30/23)

Overall and installation dimension

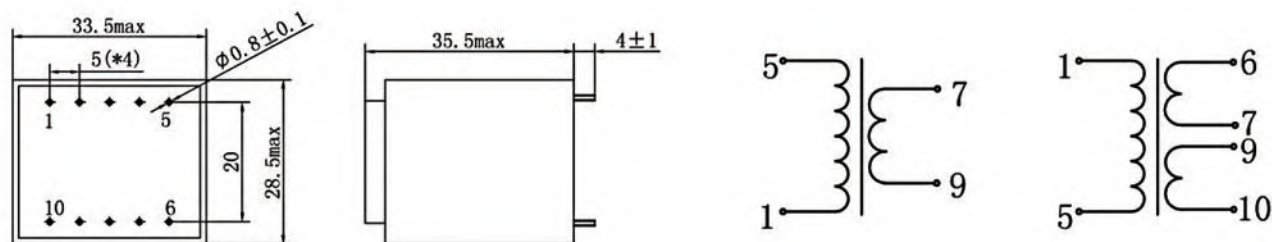


Specifications

2.8VA	ta70°C/B	Single Secondary Models		
Prim.230V	Prim.115V	Vsec.	Isec.	Certificaton
E3023064	E3023164	4.5V	622mA	ECM
E3023050	E3023150	6V	467mA	ECM
E3023052	E3023152	7.5V	373mA	ECM
E3023054	E3023154	9V	311mA	ECM
E3023056	E3023156	12V	233mA	ECM
E3023058	E3023158	15V	187mA	ECM
E3023060	E3023160	18V	156mA	ECM
E3023062	E3023162	24V	117mA	ECM

2.8VA	ta70°C/B	Dual Secondary Models		
Prim.230V	Prim.115V	Vsec.	Isec.	Certificaton
E3023065	E3023165	2x4.5V	2x311mA	ECM
E3023051	E3023151	2x6V	2x233mA	ECM
E3023053	E3023153	2x7.5V	2x187mA	ECM
E3023055	E3023155	2x9V	2x156mA	ECM
E3023057	E3023157	2x12V	2x117mA	ECM
E3023059	E3023159	2x15V	2x93mA	ECM
E3023061	E3023161	2x18V	2x78mA	ECM
E3023063	E3023163	2x24V	2x58mA	ECM

E3023 Series (EI30/23)

Overall and installation dimension

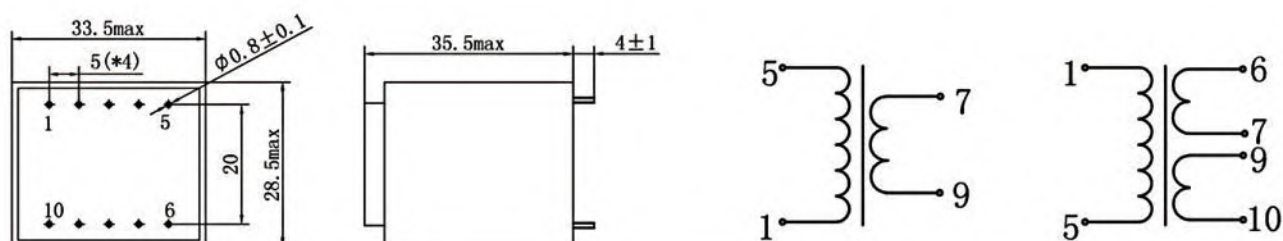

Specifications





3.2VA	ta40°C/B	Single Secondary Models		
Prim.230V	Prim.115V	Vsec.	Isec.	Certificaton
E3023014	E3023114	4.5V	711mA	ECM
E3023000	E3023100	6V	533mA	ECM
E3023002	E3023102	7.5V	427mA	ECM
E3023004	E3023104	9V	356mA	ECM
E3023006	E3023106	12V	267mA	ECM
E3023008	E3023108	15V	213mA	ECM
E3023010	E3023110	18V	178mA	ECM
E3023012	E3023112	24V	133mA	ECM

3.2VA	ta40°C/B	Dual Secondary Models		
Prim.230V	Prim.115V	Vsec.	Isec.	Certificaton
E3023015	E3023115	2x4.5V	2x356mA	ECM
E3023001	E3023101	2x6V	2x267mA	ECM
E3023003	E3023103	2x7.5V	2x213mA	ECM
E3023005	E3023105	2x9V	2x178mA	ECM
E3023007	E3023107	2x12V	2x133mA	ECM
E3023009	E3023109	2x15V	2x107mA	ECM
E3023011	E3023111	2x18V	2x89mA	ECM
E3023013	E3023113	2x24V	2x67mA	ECM

◆ Encapsulated Transformer

E4215 Series (EI42/14.8)

Overall and installation dimension







Specifications

5.0VA	ta70°C/B	Single Secondary Models		
Prim.230V	Prim.115V	Vsec.	Isec.	Certificaton
E4215064	E4215164	4.5V	1111mA	ECM
E4215050	E4215150	6V	833mA	ECM
E4215052	E4215152	7.5V	666mA	ECM
E4215054	E4215154	9V	555mA	ECM
E4215056	E4215156	12V	416mA	ECM
E4215058	E4215158	15V	333mA	ECM
E4215060	E4215160	18V	277mA	ECM
E4215062	E4215162	24V	208mA	ECM

5.0VA	ta70°C/B	Dual Secondary Models		
Prim.230V	Prim.115V	Vsec.	Isec.	Certificaton
E4215065	E4215165	2x4.5V	2x555mA	ECM
E4215051	E4215151	2x6V	2x416mA	ECM
E4215053	E4215153	2x7.5V	2x333mA	ECM
E4215055	E4215155	2x9V	2x277mA	ECM
E4215057	E4215157	2x12V	2x208mA	ECM
E4215059	E4215159	2x15V	2x166mA	ECM
E4215061	E4215161	2x18V	2x138mA	ECM
E4215063	E4215163	2x24V	2x104mA	ECM

E4215 Series (EI42/14.8)

Overall and installation dimension



Specifications





6.0VA	ta40°C/B	Single Secondary Models		
Prim.230V	Prim.115V	Vsec.	Isec.	Certificaton
E4215014	E4215104	4.5V	1333mA	ECM
E4215000	E4215100	6V	1000mA	ECM
E4215002	E4215102	7.5V	800mA	ECM
E4215004	E4215104	9V	666mA	ECM
E4215006	E4215106	12V	500mA	ECM
E4215008	E4215108	15V	400mA	ECM
E4215010	E4215110	18V	333mA	ECM
E4215012	E4215112	24V	250mA	ECM

6.0VA	ta40°C/B	Dual Secondary Models		
Prim.230V	Prim.115V	Vsec.	Isec.	Certificaton
E4215015	E4215115	2x4.5V	2x666mA	ECM
E4215001	E4215101	2x6V	2x500mA	ECM
E4215003	E4215103	2x7.5V	2x400mA	ECM
E4215005	E4215105	2x9V	2x333mA	ECM
E4215007	E4215107	2x12V	2x250mA	ECM
E4215009	E4215109	2x15V	2x200mA	ECM
E4215011	E4215111	2x18V	2x166mA	ECM
E4215013	E4215113	2x24V	2x125mA	ECM

◆ Encapsulated Transformer

E4817 Series (EI48/16.8)

Overall and installation dimension







Specifications

8.0VA	ta70°C/B	Single Secondary Models		
Prim.230V	Prim.115V	Vsec.	Isec.	Certificaton
E4817064	E4817164	4.5V	1777mA	ECM
E4817050	E4817150	6V	1333mA	ECM
E4817052	E4817152	7.5V	1066mA	ECM
E4817054	E4817154	9V	888mA	ECM
E4817056	E4817156	12V	666mA	ECM
E4817058	E4817158	15V	533mA	ECM
E4817060	E4817160	18V	444mA	ECM
E4817062	E4817162	24V	333mA	ECM

8.0VA	ta70°C/B	Dual Secondary Models		
Prim.230V	Prim.115V	Vsec.	Isec.	Certificaton
E4817065	E4817165	2x4.5V	2x888mA	ECM
E4817051	E4817151	2x6V	2x666mA	ECM
E4817053	E4817153	2x7.5V	2x533mA	ECM
E4817055	E4817155	2x9V	2x444mA	ECM
E4817057	E4817157	2x12V	2x333mA	ECM
E4817059	E4817159	2x15V	2x266mA	ECM
E4817061	E4817161	2x18V	2x222mA	ECM
E4817063	E4817163	2x24V	2x166mA	ECM

E4817 Series (EI48/16.8)

Overall and installation dimension



Specifications





10VA	ta40°C/B	Single Secondary Models		
Prim.230V	Prim.115V	Vsec.	Isec.	Certificaton
E4817014	E4817104	4.5V	2222mA	ECM
E4817000	E4817100	6V	1666mA	ECM
E4817002	E4817102	7.5V	1333mA	ECM
E4817004	E4817104	9V	1111mA	ECM
E4817006	E4817106	12V	833mA	ECM
E4817008	E4817108	15V	666mA	ECM
E4817010	E4817110	18V	555mA	ECM
E4817012	E4817112	24V	416mA	ECM

10VA	ta40°C/B	Dual Secondary Models		
Prim.230V	Prim.115V	Vsec.	Isec.	Certificaton
E4817015	E4817115	2x4.5V	2x1111mA	ECM
E4817001	E4817101	2x6V	2x833mA	ECM
E4817003	E4817103	2x7.5V	2x666mA	ECM
E4817005	E4817105	2x9V	2x555mA	ECM
E4817007	E4817107	2x12V	2x416mA	ECM
E4817009	E4817109	2x15V	2x333mA	ECM
E4817011	E4817111	2x18V	2x277mA	ECM
E4817013	E4817113	2x24V	2x208mA	ECM

◆ Encapsulated Transformer

E3814 Series (EI38/13.6)

Overall and installation dimension







Specifications

3.5VA	ta70°C/B	Single Secondary Models		
Prim.230V	Prim.115V	Vsec.	Isec.	Certificaton
E3814064	E3814164	4.5V	777mA	ECM
E3814050	E3814150	6V	583mA	ECM
E3814052	E3814152	7.5V	466mA	ECM
E3814054	E3814154	9V	388mA	ECM
E3814056	E3814156	12V	291mA	ECM
E3814058	E3814158	15V	233mA	ECM
E3814060	E3814160	18V	194mA	ECM
E3814062	E3814162	24V	145mA	ECM

3.5VA	ta70°C/B	Dual Secondary Models		
Prim.230V	Prim.115V	Vsec.	Isec.	Certificaton
E3814065	E3814165	2x4.5V	2x388mA	ECM
E3814051	E3814151	2x6V	2x291mA	ECM
E3814053	E3814153	2x7.5V	2x233mA	ECM
E3814055	E3814155	2x9V	2x194mA	ECM
E3814057	E3814157	2x12V	2x145mA	ECM
E3814059	E3814159	2x15V	2x116mA	ECM
E3814061	E3814161	2x18V	2x97mA	ECM
E3814063	E3814163	2x24V	2x72mA	ECM

E3814 Series (EI38/13.6)

Overall and installation dimension



Specifications




4.0VA	ta40°C/B	Single Secondary Models		
Prim.230V	Prim.115V	Vsec.	Isec.	Certificaton
E3814014	E3814114	4.5V	888mA	ECM
E3814000	E3814100	6V	666mA	ECM
E3814002	E3814102	7.5V	533mA	ECM
E3814004	E3814104	9V	444mA	ECM
E3814006	E3814106	12V	333mA	ECM
E3814008	E3814108	15V	266mA	ECM
E3814010	E3814110	18V	222mA	ECM
E3814012	E3814112	24V	166mA	ECM

4.0VA	ta40°C/B	Dual Secondary Models		
Prim.230V	Prim.115V	Vsec.	Isec.	Certificaton
E3814015	E3814115	2x4.5V	2x444mA	ECM
E3814001	E3814101	2x6V	2x333mA	ECM
E3814003	E3814103	2x7.5V	2x266mA	ECM
E3814005	E3814105	2x9V	2x222mA	ECM
E3814007	E3814107	2x12V	2x166mA	ECM
E3814009	E3814109	2x15V	2x133mA	ECM
E3814011	E3814111	2x18V	2x111mA	ECM
E3814013	E3814113	2x24V	2x83mA	ECM

◆ Encapsulated Transformer

E4821 Series (EI48/20.5)

Overall and installation dimension

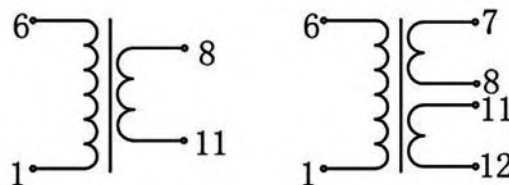




Specifications

10VA	ta70°C/B	Dual Secondary Models		
Prim.230V	Prim.115V	Vsec.	Isec.	Certificaton
E4821065	E4821165	2x4.5V	2x1111mA	ECM
E4821051	E4821151	2x6V	2x833mA	ECM
E4821053	E4821153	2x7.5V	2x666mA	ECM
E4821055	E4821155	2x9V	2x555mA	ECM
E4821057	E4821157	2x12V	2x416mA	ECM
E4821059	E4821159	2x15V	2x333mA	ECM
E4821061	E4821161	2x18V	2x277mA	ECM
E4821063	E4821163	2x24V	2x208mA	ECM

12VA	ta40°C/B	Single Secondary Models		
Prim.230V	Prim.115V	Vsec.	Isec.	Certificaton
E4821014	E4821104	4.5V	2666mA	ECM
E4821000	E4821100	6V	2000mA	ECM
E4821002	E4821102	7.5V	1600mA	ECM
E4821004	E4821104	9V	1333mA	ECM
E4821006	E4821106	12V	1000mA	ECM
E4821008	E4821108	15V	800mA	ECM
E4821010	E4821110	18V	666mA	ECM
E4821012	E4821112	24V	500mA	ECM

E5419 Series (EI54/18.8)

Overall and installation dimension

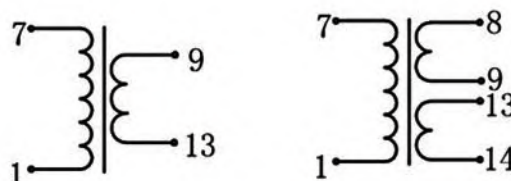

Specifications





13VA	ta70°C/B	Dual Secondary Models		
Prim.230V	Prim.115V	Vsec.	Isec.	Certificaton
E5419565	E5419665	2x4.5V	2x1444mA	ECM
E5419551	E5419651	2x6V	2x1083mA	ECM
E5419553	E5419653	2x7.5V	2x866mA	ECM
E5419555	E5419655	2x9V	2x722mA	ECM
E5419557	E5419657	2x12V	2x541mA	ECM
E5419559	E5419659	2x15V	2x433mA	ECM
E5419561	E5419661	2x18V	2x361mA	ECM
E5419563	E5419663	2x24V	2x270mA	ECM

16VA	ta40°C/B	Single Secondary Models		
Prim.230V	Prim.115V	Vsec.	Isec.	Certificaton
E5419514	E5419614	4.5V	3555mA	ECM
E5419500	E5419600	6V	2666mA	ECM
E5419502	E5419602	7.5V	2133mA	ECM
E5419504	E5419604	9V	1777mA	ECM
E5419506	E5419606	12V	1333mA	ECM
E5419508	E5419608	15V	1066mA	ECM
E5419510	E5419610	18V	888mA	ECM
E5419512	E5419612	24V	666mA	ECM

◆ Encapsulated Transformer

E6021 Series (EI60/21)

Overall and installation dimension

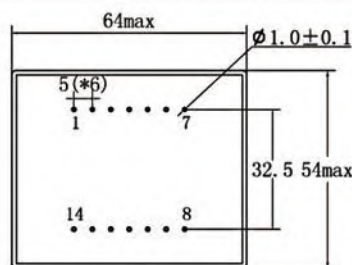





Specifications

20VA	ta70°C/B	Dual Secondary Models		
Prim.230V	Prim.115V	Vsec.	Isec.	Certificaton
E6021065	E6021165	2x4.5V	2x2222mA	ECM
E6021051	E6021151	2x6V	2x1666mA	ECM
E6021053	E6021153	2x7.5V	2x1333mA	ECM
E6021055	E6021155	2x9V	2x1111mA	ECM
E6021057	E6021157	2x12V	2x833mA	ECM
E6021059	E6021159	2x15V	2x666mA	ECM
E6021061	E6021161	2x18V	2x555mA	ECM
E6021063	E6021163	2x24V	2x416mA	ECM

25VA	ta40°C/B	Single Secondary Models		
Prim.230V	Prim.115V	Vsec.	Isec.	Certificaton
E6021014	E6021114	4.5V	5555mA	ECM
E6021000	E6021100	6V	4166mA	ECM
E6021002	E6021102	7.5V	3333mA	ECM
E6021004	E6021104	9V	2777mA	ECM
E6021006	E6021106	12V	2083mA	ECM
E6021008	E6021108	15V	1666mA	ECM
E6021010	E6021110	18V	1388mA	ECM
E6021012	E6021112	24V	1041mA	ECM

E6031 Series (EI60/31)

Overall and installation dimension



Specifications

30VA	ta70°C/B	Dual Secondary Models		
Prim.230V	Prim.115V	Vsec.	Isec.	Certificaton
E6031565	E6031665	2x4.5V	2x3333mA	ECM
E6031551	E6031651	2x6V	2x2500mA	ECM
E6031553	E6031653	2x7.5V	2x2000mA	ECM
E6031555	E6031655	2x9V	2x1666mA	ECM
E6031557	E6031657	2x12V	2x1250mA	ECM
E6031559	E6031659	2x15V	2x1000mA	ECM
E6031561	E6031661	2x18V	2x833mA	ECM
E6031563	E6031663	2x24V	2x625mA	ECM

35VA	ta40°C/B	Single Secondary Models		
Prim.230V	Prim.115V	Vsec.	Isec.	Certificaton
E6031514	E6031614	4.5V	7777mA	ECM
E6031500	E6031600	6V	5833mA	ECM
E6031502	E6031602	7.5V	4666mA	ECM
E6031504	E6031604	9V	3888mA	ECM
E6031506	E6031606	12V	2916mA	ECM
E6031508	E6031608	15V	2333mA	ECM
E6031510	E6031610	18V	1944mA	ECM
E6031512	E6031612	24V	1458mA	ECM